

HiPace 400

Turbomolecular vacuum pumps

PFEIFFER 
VACUUM+FAB SOLUTIONS

Part of the **BUSCH** GROUP



High gas throughput

High pumping speed, compatible with a variety of backing pumps, high compression for light gases

High performance

Optimized rotor geometry, enhanced gas load handling

Reliable

Best-in-class hybrid bearing technology, superior bearing lubrication for long life cycle

Accessories, spare parts and options

- Electrical adapter
- Mains cable
- Connecting cable
- Various fieldbus systems
- Power supply kit and display unit
- Mounting kit
- Safety valve
- Venting accessories
- Power failure venting unit
- Vibration damper


HiPace 400

Turbomolecular vacuum pumps

PFEIFFER
VACUUM+FAB SOLUTIONS

Part of the **BUSCH** GROUP

Pumping speed

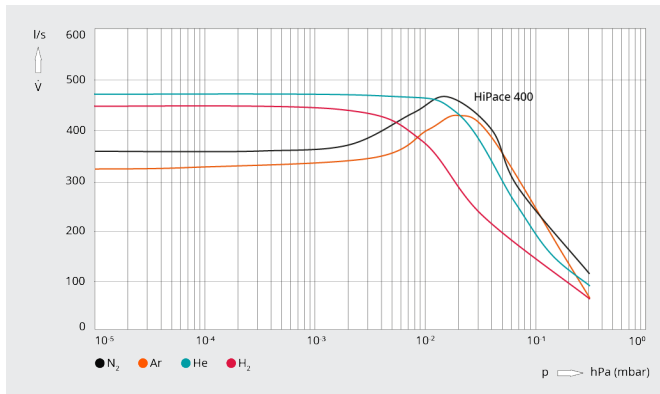

HiPace 400	
Pumping speed for N ₂	355 I/s
Pumping speed for H ₂	445 I/s
Pumping speed for He	470 I/s
Pumping speed for Ar	320 I/s
Compression ratio for N ₂	$1 \cdot 10^{11}$
Compression ratio for H ₂	$4 \cdot 10^5$
Compression ratio for He	$3 \cdot 10^7$
Compression ratio for Ar	$1 \cdot 10^{11}$
Gas throughput at final rotational speed for N ₂	6.5 hPa I/s
Gas throughput at final rotational speed for H ₂	14 hPa I/s
Gas throughput at final rotational speed for He	20 hPa I/s
Gas throughput at final rotational speed for Ar	3.5 hPa I/s
Forevacuum max. for N ₂	11 hPa
Run-up time	4 min
Sound pressure level (EN ISO 2151)	50 dBA
Weight approx.	11.6 kg

HiPace 400

Turbomolecular vacuum pumps

PFEIFFER 
VACUUM+FAB SOLUTIONS

Part of the **BUSCH** GROUP

HiPace 400	
Communication interfaces standard	RS-485, remote
Mounting orientation	arbitrary
Gas inlet / outlet	DN 100 ISO-K/ISO-F/CF-F / DN 25 ISO-KF /G 1/4"

DO YOU WANT TO KNOW MORE?

Get in touch with us directly!



CONTACT FORM