

HiPace 300 H

Turbomolecular vacuum pumps

PFEIFFER 
VACUUM+FAB SOLUTIONS

Part of the **BUSCH** GROUP



High performance

Best compression ratio for light gases, perfectly suited for high and ultra-high vacuum applications

Reliable

Best-in-class hybrid bearing technology, long life cycle, maximum uptime

Quiet

Low noise and vibration levels thanks to patented laser balancing technology

Accessories, spare parts and options

- Electrical adapter
- Mains cable
- Connecting cable
- Various fieldbus systems
- Power supply kit and display unit
- Mounting kit
- Safety valve
- Venting accessories
- Power failure venting unit
- Vibration damper


HiPace 300 H

Turbomolecular vacuum pumps

PFEIFFER
VACUUM+FAB SOLUTIONS

Part of the **BUSCH** GROUP

Pumping speed

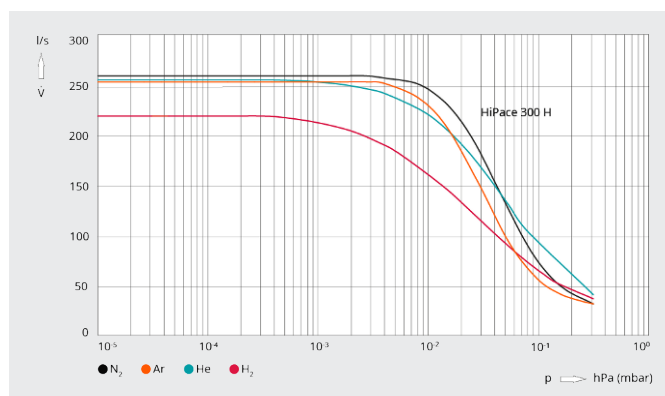

HiPace 300 H	
Pumping speed for N ₂	260 l/s
Pumping speed for H ₂	220 l/s
Pumping speed for He	255 l/s
Pumping speed for Ar	255 l/s
Compression ratio for N ₂	1 · 10 ¹³
Compression ratio for H ₂	1 · 10 ⁷
Compression ratio for He	2.5 · 10 ⁹
Compression ratio for Ar	1 · 10 ¹³
Gas throughput at final rotational speed for N ₂	1.5 hPa l/s
Gas throughput at final rotational speed for H ₂	10 hPa l/s
Gas throughput at final rotational speed for He	3.5 hPa l/s
Gas throughput at final rotational speed for Ar	0.5 hPa l/s
Forevacuum max. for N ₂	30 hPa
Run-up time	3.5 min
Sound pressure level (EN ISO 2151)	50 dBA
Weight approx.	6.2 kg

HiPace 300 H

Turbomolecular vacuum pumps

PFEIFFER 
VACUUM+FAB SOLUTIONS

Part of the **BUSCH** GROUP

HiPace 300 H	
Communication interfaces standard	RS-485, remote
Mounting orientation	arbitrary
Gas inlet / outlet	DN 100 ISO-K/ISO-F/CF-F / DN 16 ISO-KF /G 1/4"

DO YOU WANT TO KNOW MORE?

Get in touch with us directly!



CONTACT FORM